



MicroLouvre™ Screens Datasheet

Frame options:

Various to suit application

Thickness of fabric:

1.5mm coated

Weft width:

1.25mm coated

Weft thickness:

0.30mm coated

Louvre pitch:

1.5mm centre to centre

Gap between each louvre:

1.20mm coated

Warp spacing:

12.70mm centre to centre

Clear open area:

80%

Openness factor:

67%

Screen weight:

3-4 kg/m² dependent on frame option/size

Frame composition:

Extrusions - Aluminium EN AW-6063 T6

Lacer Wire – 316 Stainless Steel

Anti-Vibration Wedge – Synthetic Rubber (EPDM)

Thermal Break - Neoprene

Fabric composition:

90% CuZn10 (C220) commercial bronze and 10% CUSi3Mn1

(C655) silicon bronze

Finishes:

Polyester powder coat in any RAL colour (with the ability to create designs on the fabric which are directionally visible)

Fire rating:

Class A1/A2-s1,d0 in accordance with BS EN 13501-1:2007+A1:2009

Fire attenuation:


49.4% | Compliant screening for bushfire up to BAL-40 (based on 40kW/m² incident irradiance)

Resistance to wind:

Hurricane proof: 100mph/160kph

Wind load:


<14.65 kgf/m²

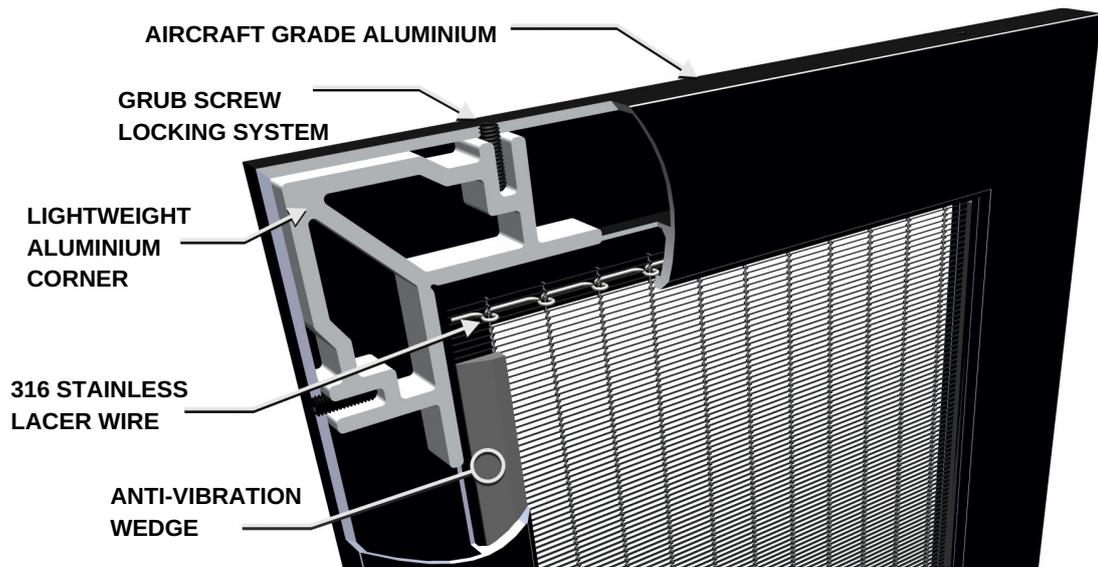

A result of decades of extensive international research and development, MicroLouvre is a high-performance, woven metal fabric, with its weft constructed of bronze louvres. Window covering screens are constructed by tensioning the fabric in aluminium framing and incorporate an anti-vibration wedge to enhance the screen's integrity at wind speeds in excess of 100mph/160kph.

The micro-fine louvres are angled to suit a number of applications, whether to ensure optimum light in, and visibility out, whilst blocking heat and glare or, to allow ventilation and even protect from external viewing in.

It's known as angular selective technology.

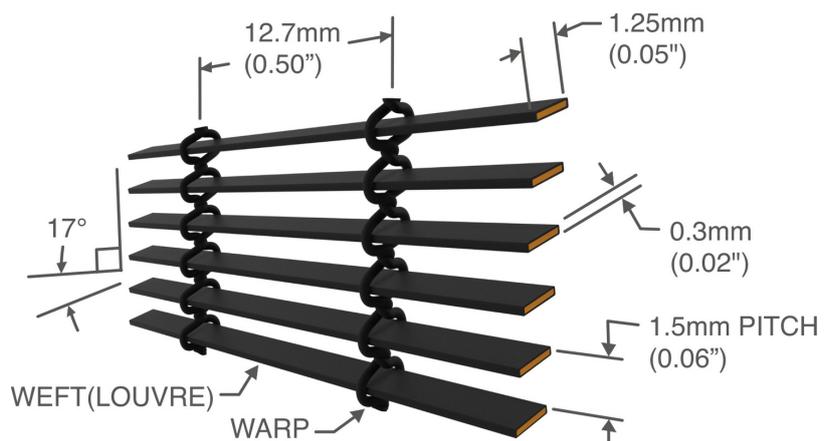

*All angles, weights and dims are nominal

Solar Shading	Glare Protection
Fire Protection	Heat Attenuation
Pest Protection	Privacy and Security

Visit us: www.smartlouvre.com

Talk to us: +44 (0) 239 245 6333

Request a sample: info@smartlouvre.com